

SPECIFICATIONS



MediaMatrix® Miniframe 108™

SPECIFICATIONS

SYSTEM CONTROLLER CARD:

Processor:

80486 DX2 66 MHz
(equivalent or greater)

Cache:

128 K

Memory:

8 MB RAM

Drives:

3.5" FDD
420 MB HDD (minimum)

SYSTEM CONTROLS:

Keyboard Lock
Reset, HDD, and Power Switches
Power LED

Video:

1024 x 768 256-Color Video
with 70 Hz Refresh Rate

DIGITAL AUDIO PROCESSING CARD:

Processor:

Four Motorola® 56002 DSPs
(each card)

CARD I/O:

(Via MM™-8840 or MM™-8830)

8 Inputs (expandable to 16)
8 Outputs (expandable to 16)

FILTERED AIR SYSTEM:

12 V DC fan
Air movement is 168 CFM (Cubic Feet
Per Minute)
Fan Size: 4.69" x 4.69" x 1"

PHYSICAL CHARACTERISTICS:

Enclosure Dimensions:

Height: 6.7 inches
Width: 17 inches
Length: 18.5 inches

Front Panel:

Height: 7 inches
Width: 19 inches

Weight:

56 lbs.

POWER SUPPLY:

250 watt, Four Output
Complies with UL/CSA/VDE/CE

Input Voltage:

110-220 V AC

Input Frequency:

50 Hz to 60 Hz

OPERATING SYSTEM:

DOS, Windows™ for System Controller
Card
MWare™ operating software for Digital
Audio Processing Card (In Windows™
Environment)

AUDIO DEVICES:

Automatic Mixers from 2 to 8 (expandable
to 16) channels
MM-8800 Series Control
Externally controllable levels, switches,
and routers
Crossovers: 2-way, 3-way, and 4-way
slopes from 6 to 24 dB per octave
in 6 dB steps

Delay Lines of various delay lengths

and number of taps
Automatic Gain Control
Compressor/Limiter
Ducker
Expander
Noise Gate
1/3 octave graphic equalizer
1 octave graphic equalizer
Parametric Equalizers
High Pass Filter
Low Pass Filter
All Pass Filter
High Shelf Filter
Low Shelf Filter
Tone Control
Inputs
Level
Level with Trim
Overload Indicator
Signal Present Indicator
Meters
Mixers in various configurations from 2
to 8 inputs, from 1 to 8 buses,
expandable to 16
Output
Label
Block
Presets
Pink Noise Generator
Probe
Sine Generator
White Noise Generator
Additionally, new devices may be
created and stored by the operator.

FEATURES:

- Four Motorola 56002 DSP's
(equivalent to one MM-DSP
DPU card)
- 8 Channels of I/O standard

- (expandable to 16)
- Standard 19" NEMA rack-mount enclosure
- 1024 x 768 256-Color Video with a 70Hz refresh rate
- 250 Watt, 4 output power supply
- Lockable front control panel
- Heavy-duty, all-welded construction
- Three (3) switches for keyboard lock, processor reset, and auxiliary functions
- 420 MB HDD
- 3.5" FDD

DESCRIPTION

The MediaMatrix® Miniframe 108 is the heart of an unprecedented digital audio system. The system is based on an open architecture that utilizes a system controller card and one or more digital processing cards employing four (4) Motorola 56002 DSP chips. When attached to the MM™-8830 or MM™-8840 Digital Interface, it provides 8 inputs and 8 outputs. The maximum system capacity is 16 total inputs and outputs. The MediaMatrix MWare™ operating software provides the user/designer

the ability to design, wire (in the soft domain), and troubleshoot a complete digital audio system. The user can then control all the parameters of the system or create custom panels, or even devices, to provide solutions not previously available.

The MWare™ operating software provides system diagnostics, system design, audio devices, and DSP compiling features, which run under the familiar Windows™ environment.

ARCHITECTURAL & ENGINEERING SPECIFICATIONS

The audio processing shall be in the digital domain following the input source and shall remain until power amplification is required. The audio processing system shall be able to provide a list of audio devices, which may be chosen and configured into the system at any time, from a device menu running under the familiar Windows™ environment. The list shall include, but not be limited to, Automatic Mixers from 2 to 16 channels; Digital Interface controls; externally controllable levels, switches, and routers; Crossovers: 2-way, 3-way,

and 4-way slopes configurable from 6 to 24 dB per octave in 6 dB steps; Delay lines of various delay lengths and number of taps; Automatic Gain Control; Compressor/Limiter; Ducker; Expander; Noise Gate; 1/3 octave graphic equalizer; 1 octave graphic equalizer; Parametric Equalizers from 1 to 8 band; High Pass Filter; Low Pass Filter; All Pass Filter; High Shelf Filter; Low Shelf Filter; Tone Control; Inputs; Level; Level with Trim; Overload Indicator; Signal Present Indicator; Peak Meter; R.M.S. Meter; Mixers in various configurations from 2 to 8 inputs (expandable to 16), from 1 to 16 buses; Output; Label; Block; Presets; Routers from 1x1 to 16x16; Pink Noise Generator; Probe; Sine Generator; White Noise Generator; and the ability to create and store new devices as required.

The hardware shall consist of one (1) system controller card and digital audio processing card with four (4) Motorola 56002 DSP chips. The system shall have diagnostics software available for troubleshooting system hardware. The system shall have a minimum of a 250 Watt power supply. The system shall be a MediaMatrix® Miniframe 108™.

Windows™ is a trademark of Microsoft Corporation

Motorola® is a registered trademark of Motorola, Inc.

LIMITED WARRANTY


Peavey Electronics Corporation warrants to the original purchaser of this new Architectural Acoustics product that it is free from defects in material and workmanship. If within one (1) year from date of purchase a properly installed product proves to be defective and Peavey is notified, Peavey will repair or replace it at no charge. (Note: Batteries and patch cords not covered.) "Original purchaser" means the customer for whom the product is originally installed.

Damage resulting from improper installation, interconnection of a unit or system of another manufacturer, accident or unreasonable use, neglect or any other cause not arising from defects in material and workmanship is not covered by this warranty. The warranty is valid only as to products purchased and installed in the United States and Canada.


THIS LIMITED WARRANTY IS IN LIEU OF ANY AND ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE. UNDER NO CIRCUMSTANCES WILL PEAVEY BE LIABLE FOR ANY LOST PROFITS, LOST SAVINGS, INCIDENTAL DAMAGES OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PRODUCT, EVEN IF PEAVEY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. THIS LIMITED WARRANTY IS THE ONLY EXPRESSED WARRANTY ON THIS PRODUCT, AND NO OTHER STATEMENT, REPRESENTATION, WARRANTY, OR AGREEMENT BY ANY PERSON SHALL BE VALID OR BINDING UPON PEAVEY.

Peavey's liability to the original purchaser for damages for any cause whatsoever and regardless of the form of action is limited to the actual damages up to the greater of Five Hundred Dollars (\$500) or an amount equal to the purchase price of the product that caused the damage or that is the subject of or is directly related to the cause of action. This limitation of liability will not apply to claims for personal injury or damage to real property or tangible personal property allegedly caused by Peavey's negligence. For information on service under this warranty, call a Peavey customer service representative at (601) 483-5376.


MediaMatrix® Miniframe 108™

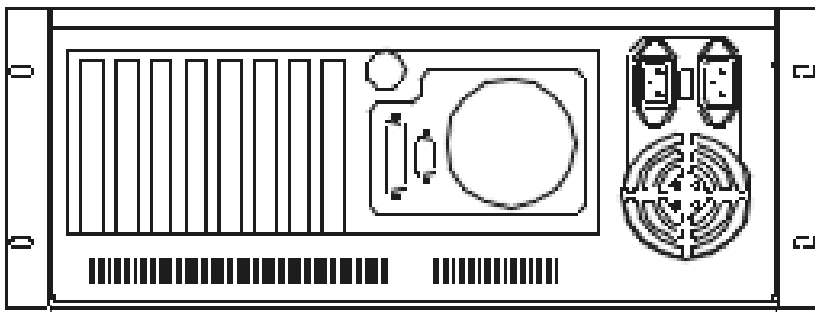


17.03"
REAR VIEW

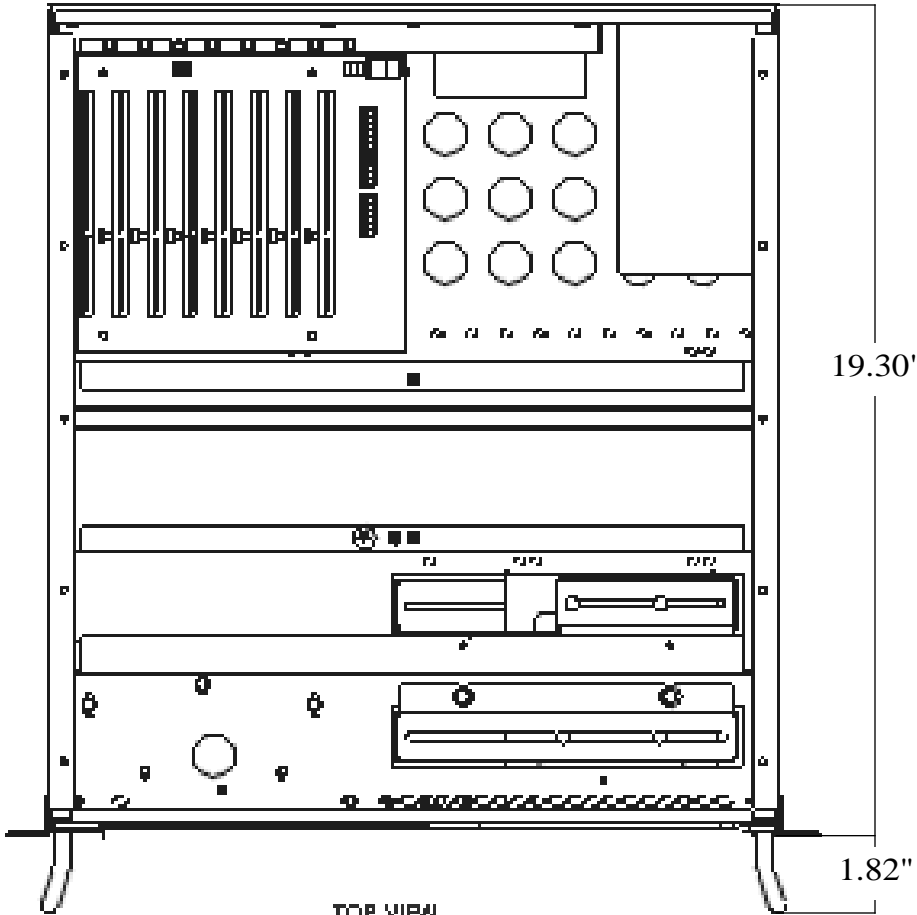

TOP VIEW



SIDE VIEW

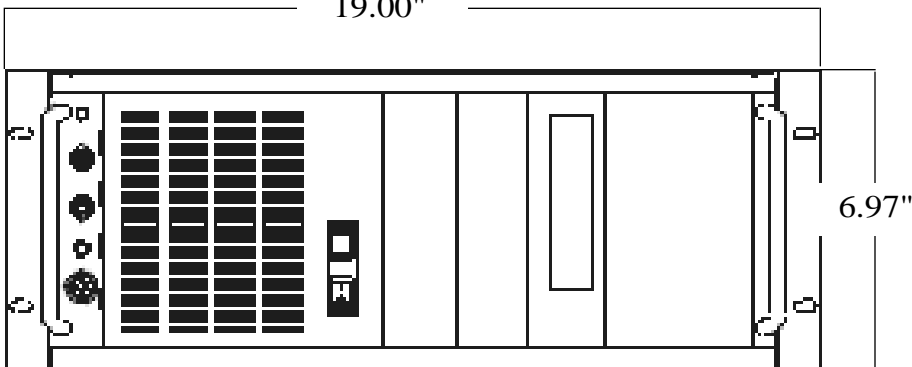

FRONT VIEW



Features and specifications subject to change without notice.

A Division of **Peavey Electronics Corporation**
711 A Street / Meridian, MS 39301 / U.S.A. / (601) 483-5376 / Fax 486-1154
#80300409