

**Dimensions (H x W x D):**

22.375" x 17.75" x 12.5625"
56.833 cm x 45.085 cm x
31.909 cm

Weight:

40 lbs. (18.18 kg)

Mounting or suspension:

⚠ Die-cast aluminum 1-3/8" pole-mount cup for stand-mounting

Features

- Two-way sound reinforcement monitor enclosure
- 30° and 45° dual angle monitoring
- Peavey exclusive Sheffield Pro 1200+ woofer with 2.5" voice coil
- 1.4" 14XT titanium diaphragm compression driver
- Sound Guard IV tweeter protection
- 500 Watt program/1000 Watt peak power handling
- Heavy duty crossover network for driver protection and EQ
- Lightweight trapezoidal enclosure
- 90° x 40° coverage constant directivity horn for better off-axis tonality
- High quality, heavy duty carpet covering
- Steel handle
- Rugged dado and rabbit construction for lightweight-yet-strong joints
- T-Nut speaker mounting
- Heavy duty, full-length steel grille
- SA-1 die-cast aluminum pole mount

Frequency range (-10 dB, half space):

52 Hz to 21 kHz

Frequency response (±3 dB, half space):

68 Hz to 17 kHz

Sensitivity (1W/1M):

98 dB

Power rating (program):

500 Watts

Power capacity (peak):

1000 Watts

Maximum SPL:

127 dB

Transducer complement:

Sheffield® Pro 1200+™ 12" premium woofer and 14XT™ 1.4" titanium diaphragm dynamic compression driver on a 90 x 40° coverage constant directivity horn

Driver protection:

Sound Guard™ IV for the compression driver provides long- and medium-term overload and overdrive protection

Nominal coverage pattern:

90° x 40°

Electro-acoustic crossover frequency:

2.9 kHz

Nominal impedance:

8 Ohms

Input connections:

Two 1/4" phone jacks in parallel

Enclosure materials and finish:

Trapezoidal, black carpet-covered enclosure with dado joined 1/2" MDF (Medium Density Fiberboard), and a full-length, black powder-coated steel grille



SPECIFICATIONS TLM™ 2X

Description

The TLM 2X is a two-way floor monitor utilizing a 12" Sheffield® Pro 1200+™ woofer and a 14XT™ titanium diaphragm dynamic compression driver mounted on a 90° x 40° coverage constant directivity horn. The lightweight, yet rugged, carpet-covered monitor enclosure with stand-mount cup facilitates portable use a stage monitor or in other sound reinforcement applications.

The dual-angle enclosure provides a choice of 30° and 45° monitoring angles for full monitoring utility. A full-length, black powder-coated steel grille provides driver protection and a professional appearance.

The TLM 2X speaker system is rated at 500 Watts program power handling, and the full crossover network includes high voltage film capacitors and Sound Guard™ IV

tweeter protection for clear, punchy sound and excellent long-term reliability. Two 1/4" phone jack input connectors make hook-up and daisy-chaining to other monitors a breeze.

3 + 2 YEAR LIMITED WARRANTY

NOTE: For details, refer to the warranty statement. Copies of this statement may be obtained by contacting Peavey Electronics Corporation, P.O. Box 2898, Meridian, Mississippi 39301-2898.

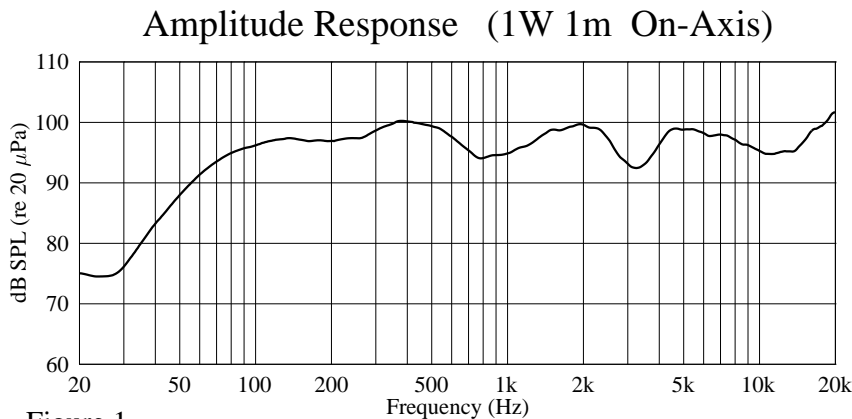


Figure 1



80305060

Features and specifications subject to change without notice.

Peavey Electronics Corporation • 711 A Street • Meridian • MS • 39301 (601) 483-5365 • FAX (601) 486-1278 • www.peavey.com

©2003 Printed in the U.S.A. 2/03

