


DM™115 Plus



FEATURES

- Impedance: 8 Ohms
- Power capacity: 1000 W Peak, 500 W Program, 250 W Continuous
- Sensitivity: 98.0 dB / 1 W 1 m
- Usable freq. range: 40 Hz ~ 3 kHz
- Voice coil diameter: 2.5" / 63 mm
- Voice coil material: 2 layers, thermally bonded copper wire, Kapton® former, Nomex® stiffener
- Net weight: 12.5 lbs. / 5.7 kg
- Znom (ohms) 8
- Revc (ohms) 5.12
- Sd (Square Meters) 0.089
- BL (T/M) 14.18
- Fo (Hz) 42.7
- Vas (liters) 212.5
- Cms (uM/N) 190.2
- Mms (gm) 73.21
- Qms 6.69
- Qes 0.500
- Qts 0.465
- Xmax (mm) 3.6
- Le (mH) 0.33
- SPL (1W 1m) 98.0
- No (%) 3.20
- Vd (cu. in. / ml) 36.2/ 593.3
- Pmax (Watts pgm.) 500
- Disp (cu. in. / ml) 196 / 3212
- Weight Unpacked: 6.83 lb(3.1 kg)
- Weight Packed: 9.04 lb(4.1 kg)
- Width Packed: 17.52"(44.5008 cm)
- Height Packed: 18.11"(45.9994 cm)
- Depth Packed: 7.28"(18.4912 cm)

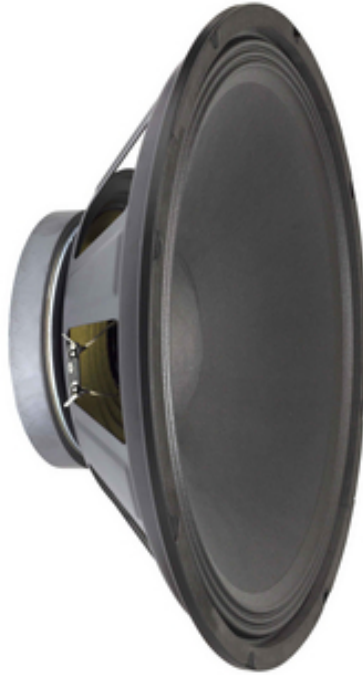