




Super Festival 610 Bass Enclosure

Specifications

Super Festival 610 -

- Black vinyl covering
- Heavy duty 6x10" speakers
- Ported cabinet;
- Top handles; Internal Pocket Casters; Metal corners; Heavy duty hardware;
- Two combi input jacks;
- Rugged Plywood Construction utilizing rebate and dado joinery to insure accurate assembly and superior bonded strength. Opposed Bracing Technique produces a tighter low end compared to traditional panel bracing on thicker panels;
- 1,200 watts program power handling.

- Impedance: 8 Ω nominal
- Minimum Impedance: 6.1 Ω at 210 Hz
- Power Handling: 1200W(rms)
- Sensitivity (1W/1m): 102dB
- Frequency Response: - 10 dB point in bass RE rated sensitivity = 60 Hz +/- 6 dB 56 Hz to 11 kHz
- Crossover Frequency: 3.8 kHz
- Box Tuning Frequency: 70 Hz
- Dimensions: Unpacked: 35.6"(h)x23.5"(w)x15.3"(d)
Packed: 38.5"(h)x25.5"(w)x18.5"(d)
- Weight: Unpacked: 79.23lb ;Packed: 86.72lb

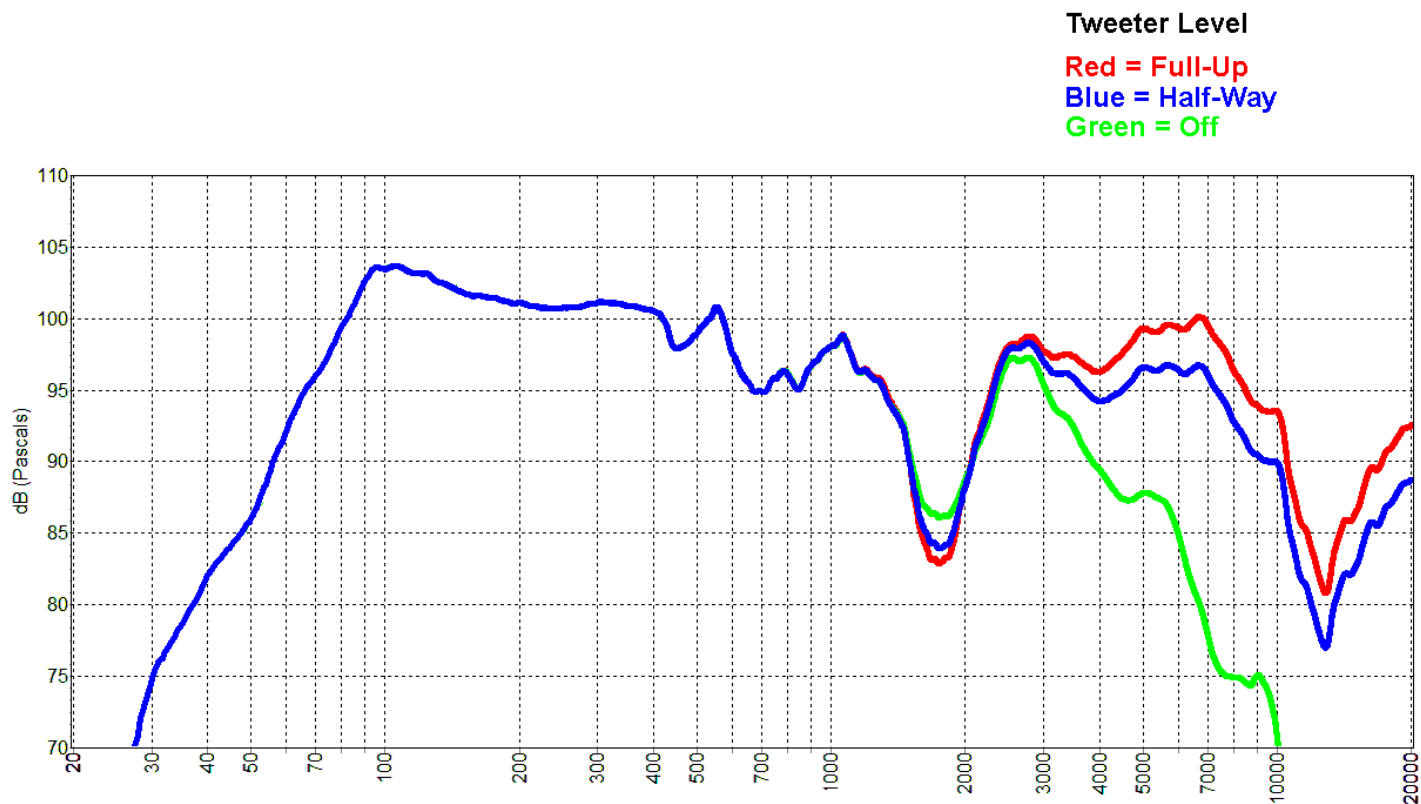

www.peavey.com

Warranty registration and information for U.S. customers available online at
www.peavey.com/warranty
 or use the QR tag below



Features and specifications subject to change without notice.

Peavey Electronics Corporation 5022 Hartley Peavey Drive Meridian, MS 39305 (601) 483-5365 FAX (601) 486-1278



Logo referenced in Directive 2002/96/EC Annex IV
 (OJ/L37/38, 13.02.03 and defined in EN 50419: 2005
 The bar is the symbol for marking of new waste and
 is applied only to equipment manufactured after
 13 August 2005