


# Scorpion® SP-12825 8 Ohm

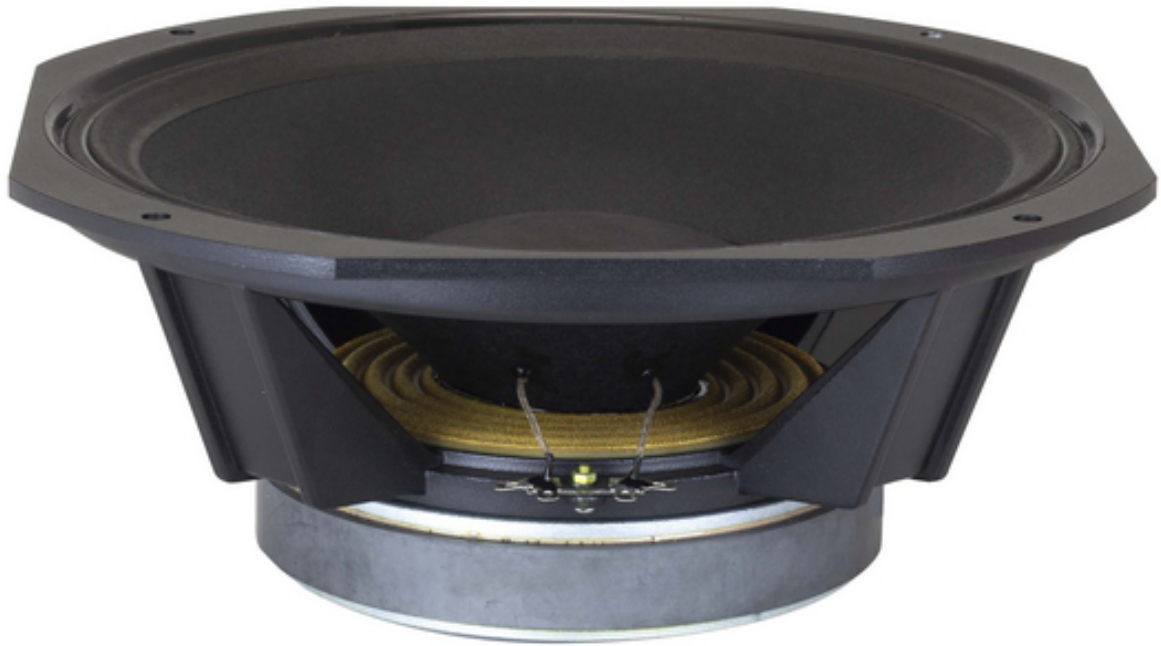

## OVERVIEW

Scorpion® SP-12825 8 Ohm

## FEATURES

- 12"
- Impedance: 8 Ohms
- Power capacity: 800 W Peak 400 W Program 200 W Continuous
- Sensitivity: 98.7 dB / 1 W 1 m
- Usable freq. range: 60 Hz ~ 4 kHz
- Cone: Kevlar® impregnated cellulose
- Voice coil diameter: 2.5" / 63.5 mm
- Voice coil material: Aluminum ribbon wire Kapton former Nomex® stiffener Solderless diffusion welded OFHC copper leads
- Net weight lb. / kg: 9.8 lbs. / 4.5 kg
- Znom (ohms) 8
- Revc (ohms) 5.70
- Sd (Square Meters) 0.050
- BL (T/M) 14.66
- Fo (Hz) 77.5
- Vas (liters) 44.8
- Cms (uM/N) 126.2
- Mms (gm) 33.40
- Qms 6.58
- Qes 0.431
- Qts 0.404
- Xmax (mm) 0.25
- Le (mH) 0.35
- SPL (1W 1m) 98.7
- No (%) 4.70%
- Vd (cu. in. / ml) 0.76/12.5
- Pmax (Watts pgm.) 400

- Disp (cu. in. / ml) 100 / 1639
- Weight Unpacked: 11.00 lb(4.99 kg)
- Weight Packed: 13.50 lb(6.123 kg)
- Width Packed: 15.5"(39.37 cm)
- Height Packed: 16"(40.64 cm)
- Depth Packed: 6.5"(16.51 cm)